


Unidade Principal Anel SFA-RM.SSF
Compacta
Ring Main Unit SFA-RM.SSF
Compact

Powered by *know-how.*

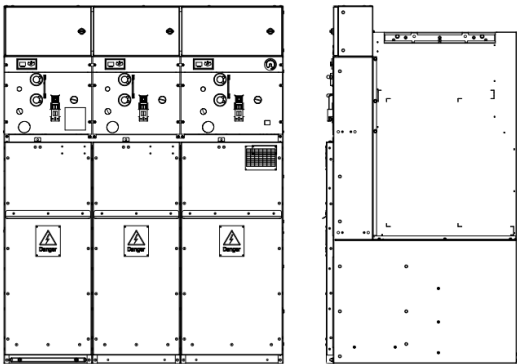

Características Gerais General Characteristics			
Tensão Nominal Rated Voltage	kV	24	36
Nível Isolamento ao Choque Rated lightning impulse withstand voltage	kV-peak	125/145	170/195
Nível Isolamento Frequência Industrial Rated power frequency withstand voltage	kV	50/60	70/80
Corrente Nominal Rated normal current	A	630	
Frequência Nominal Rated frequency	Hz	50	
Número Fases Number of phases		3	
Corrente Curto-Circuito Rated short-circuit withstand current	kA	21	16
Corrente Pico Curto-Circuito Rated peak withstand current	kA-peak	52.5	40
Duração Curto Circuito Duration of short-circuit	s	3	1
Grau Protecção / IP Class • Interruptor / Switching Compartment • Compartmento Cabos / Cable Compartment • Compartmento Fusível AT / HV Fuse Link Compartment • Compartmento Comando Manobra / Operating Mechanism Compartment		IP 67	
		IP 2X	
		IP 2X	
		IP 3X	
Grau Protecção Contra Impactos Degree of Protection Against Mechanical Impacts		IK 10	
Classificação Aparelhagem Switchgear Classification		PM	
Perda Continuidade Serviço Loss of Service Continuity		LSC 2	
Classe de Endurance Eléctrica Electrical Endurance Class		E3	
Classe de Endurance Mecânica Mechanical Endurance Class		M1 (1000x)	
Classe de Endurance de Terra Earthing Electrical Endurance Class		E2 (5x)	
Classificação Arco-Interno Internal Arc Classification (IAC)		A (FL) 21 kA-1s	A (FL) 16 kA-1s
Pressão Nominal de Enchimento de SF6 Rated Level Pressure of Filling SF6	bar (abs.)	1.25	
Pressão Mínima de Isolamento Funcional Minimum Functional Level for Insulation	bar (abs.)	1.05	
Temperatura Ambiente Ambient Temperature	°C	-5 < T < 40	
Altitude Altitude	m	< 2000	
Dimensões Gerais (Altura X Largura X Profundidade) Overall Dimensions (Height X Width X Depth)	mm	1560x 1050x 800	1620x 1370x 935
Peso Weight	Kg	570	570
Normas Standards	IEC 62271-103 IEC 62271-200 IEC 62271-206 IEC 62271-1 IEC 61243 -5 DMA-C64-420		

Fornecido por / Supplied by:

